
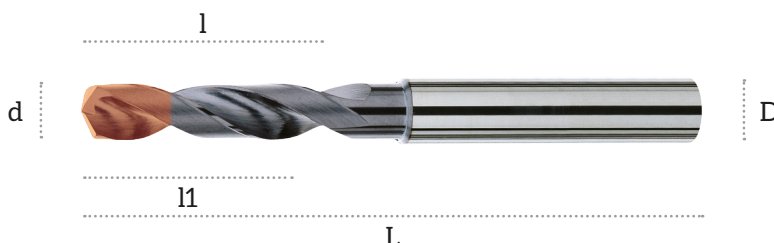


T2C Plus

THP 2.910 ST DC

Punta elicoidale ad alte prestazioni con rivestimento multifunzionale
Solid carbide high performance twist drill with multifunctional coating
Foret hélicoïdal à haute performance avec un revêtement multifonction
Hochleistungsbohrer mit Multifunktionsbeschichtung

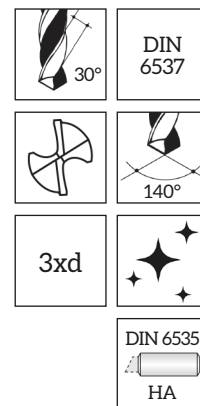

d m7	D h6	L	l	l1	T2C Plus
2.50	6.00	62	20	14	THP2.910ST-0250DC
2.80	6.00	62	20	14	THP2.910ST-0280DC
3.00	6.00	62	20	14	THP2.910ST-0300DC
3.10	6.00	62	20	14	THP2.910ST-0310DC
3.20	6.00	62	20	14	THP2.910ST-0320DC
3.30	6.00	62	20	14	THP2.910ST-0330DC
3.40	6.00	62	20	14	THP2.910ST-0340DC
3.50	6.00	62	20	14	THP2.910ST-0350DC
3.60	6.00	62	20	17	THP2.910ST-0360DC
3.70	6.00	62	20	17	THP2.910ST-0370DC
3.80	6.00	66	24	17	THP2.910ST-0380DC
3.90	6.00	66	24	17	THP2.910ST-0390DC
4.00	6.00	66	24	17	THP2.910ST-0400DC
4.10	6.00	66	24	17	THP2.910ST-0410DC
4.20	6.00	66	24	17	THP2.910ST-0420DC
4.30	6.00	66	24	17	THP2.910ST-0430DC
4.40	6.00	66	24	17	THP2.910ST-0440DC
4.50	6.00	66	24	17	THP2.910ST-0450DC
4.60	6.00	66	24	20	THP2.910ST-0460DC
4.70	6.00	66	24	20	THP2.910ST-0470DC
4.80	6.00	66	28	20	THP2.910ST-0480DC
4.90	6.00	66	28	20	THP2.910ST-0490DC
5.00	6.00	66	28	20	THP2.910ST-0500DC
5.10	6.00	66	28	20	THP2.910ST-0510DC
5.20	6.00	66	28	20	THP2.910ST-0520DC

d m7	D h6	L	l	l1	T2C Plus
5.30	6.00	66	28	20	THP2.910ST-0530DC
5.40	6.00	66	28	20	THP2.910ST-0540DC
5.50	6.00	66	28	20	THP2.910ST-0550DC
5.60	6.00	66	28	20	THP2.910ST-0560DC
5.70	6.00	66	28	20	THP2.910ST-0570DC
5.80	6.00	66	28	20	THP2.910ST-0580DC
5.90	6.00	66	28	20	THP2.910ST-0590DC
6.00	6.00	66	28	20	THP2.910ST-0600DC
6.30	8.00	79	34	24	THP2.910ST-0630DC
6.50	8.00	79	34	24	THP2.910ST-0650DC
6.80	8.00	79	34	24	THP2.910ST-0680DC
7.00	8.00	79	34	24	THP2.910ST-0700DC
7.50	8.00	79	41	29	THP2.910ST-0750DC
7.80	8.00	79	41	29	THP2.910ST-0780DC
8.00	8.00	79	41	29	THP2.910ST-0800DC
8.50	10.00	89	47	35	THP2.910ST-0850DC
8.80	10.00	89	47	35	THP2.910ST-0880DC
9.00	10.00	89	47	35	THP2.910ST-0900DC
9.20	10.00	89	47	35	THP2.910ST-0920DC
9.50	10.00	89	47	35	THP2.910ST-0950DC
9.80	10.00	89	47	35	THP2.910ST-0980DC
10.00	10.00	89	47	35	THP2.910ST-1000DC
10.20	12.00	102	55	40	THP2.910ST-1020DC
10.50	12.00	102	55	40	THP2.910ST-1050DC
10.80	12.00	102	55	40	THP2.910ST-1080DC
11.00	12.00	102	55	40	THP2.910ST-1100DC
11.50	12.00	102	55	40	THP2.910ST-1150DC
11.80	12.00	102	55	40	THP2.910ST-1180DC
12.00	12.00	102	55	40	THP2.910ST-1200DC
12.50	14.00	107	60	43	THP2.910ST-1250DC
12.80	14.00	107	60	43	THP2.910ST-1280DC
13.00	14.00	107	60	43	THP2.910ST-1300DC
13.50	14.00	107	60	43	THP2.910ST-1350DC
14.00	14.00	107	60	43	THP2.910ST-1400DC



scheda tecnica
technical data sheet
 données techniques
Technisches Datenblatt

Rivestimenti | esecuzione speciale | diametri intermedi | DIN 6535 HE
 Coating | out of range | other sizes | DIN 6535 HE
 Revêtement | exécution spéciale | diamètres intermédiaires | DIN 6535 HE
 Beschichtung | Sonderausführungen | Zwischenabmessungen | DIN 6535 HE

Su richiesta
 On request
 Sur demande
 Auf Anfrage



parametri di lavoro
cutting data
 paramètres d'usinage
Schnittdaten

Applicazioni
Application groups
 Groupe d'emploi
 Anwendungsgruppen

