




AITiSiN

THP 2.915

Punta elicoidale ad alte prestazioni con fori di lubrificazione
Solid carbide high performance twist drill with interior cooling supplies
 Foret hélicoïdale à haute performance avec trous d'huiles
 Hochleistungsbohrer mit Innenkühlungen

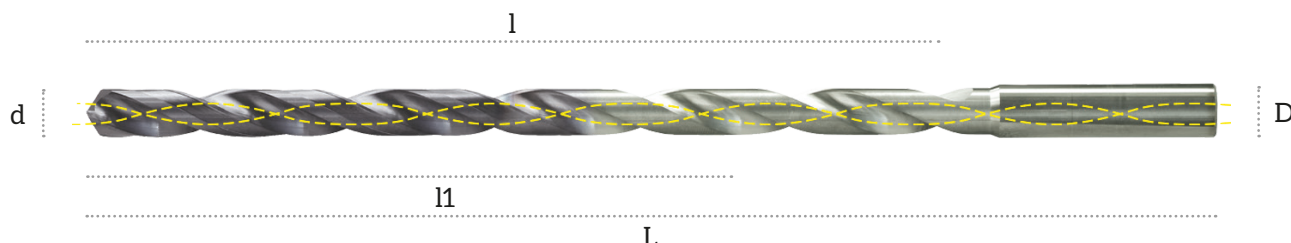

d h7	D h6	L	l	l1	AITiSiN
4.00	6.00	108	68	60	THP 2.915-0400
4.50	6.00	115	78	68	THP 2.915-0450
5.00	6.00	125	84	75	THP 2.915-0500
5.50	6.00	130	92	82	THP 2.915-0550
6.00	6.00	140	100	90	THP 2.915-0600
6.50	8.00	145	108	97	THP 2.915-0650
7.00	8.00	170	130	105	THP 2.915-0700
7.50	8.00	170	130	112	THP 2.915-0750
8.00	8.00	170	130	120	THP 2.915-0800
8.50	10.00	208	163	127	THP 2.915-0850
9.00	10.00	208	163	135	THP 2.915-0900
9.50	10.00	208	163	142	THP 2.915-0950
10.00	10.00	208	163	150	THP 2.915-1000
10.50	12.00	245	195	157	THP 2.915-1050
11.00	12.00	245	195	165	THP 2.915-1100
11.50	12.00	245	195	172	THP 2.915-1150
12.00	12.00	245	195	180	THP 2.915-1200



scheda tecnica
technical data sheet
 données techniques
 Technisches Datenblatt

Rivestimenti | esecuzione speciale | diametri intermedi | DIN 6535 HEK
Coating | out of range | other sizes | DIN 6535 HEK
 Revêtement | exécution spéciale | diamètres intermédiaires | DIN 6535 HEK
 Beschichtung | Sonderausführungen | Zwischenabmessungen | DIN 6535 HEK

Su richiesta
On request
 Sur demande
 Auf Anfrage



parametri di lavoro
cutting data
 paramètres d'usinage
 Schnittdaten

Applicazioni
Application groups
 Groupe d'emploi
 Anwendungsgruppen

