



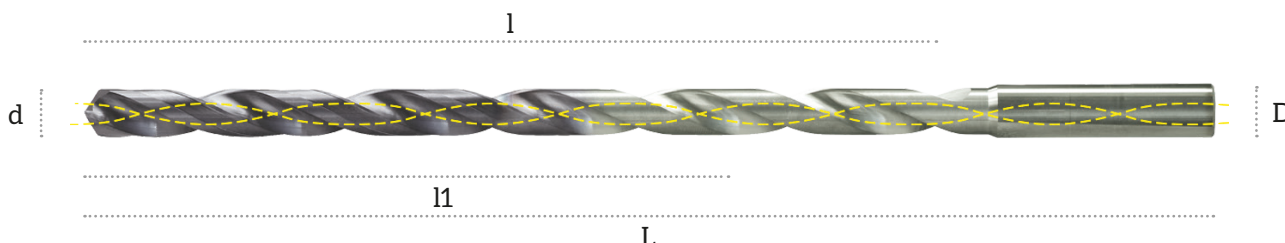

AlTiSiN

THP 2.921

Punta elicoidale ad alte prestazioni con fori di lubrificazione
Solid carbide high performance twist drill with interior cooling supplies
 Foret hélicoïdale à haute performance avec trous d'huiles
 Hochleistungsbohrer mit Innenkühlungen



d h7	D h6	L	l	l1	AlTiSiN
5.00	6.00	155	116	100	THP 2.921-0500
6.00	6.00	172	135	120	THP 2.921-0600
6.50	8.00	186	145	130	THP 2.921-0650
7.00	8.00	201	160	140	THP 2.921-0700
7.50	8.00	211	170	150	THP 2.921-0750
8.00	8.00	221	181	160	THP 2.921-0800
8.50	10.00	236	192	170	THP 2.921-0850
9.00	10.00	247	203	180	THP 2.921-0900
9.50	10.00	259	214	190	THP 2.921-0950
10.00	10.00	267	225	200	THP 2.921-1000



scheda tecnica
technical data sheet
 données techniques
 Technisches Datenblatt

Rivestimenti | esecuzione speciale | diametri intermedi | DIN 6535 HEK
Coating | out of range | other sizes | DIN 6535 HEK
 Revêtement | exécution spéciale | diamètres intermédiaires | DIN 6535 HEK
 Beschichtung | Sonderausführungen | Zwischenabmessungen | DIN 6535 HEK

Su richiesta
On request
 Sur demande
 Auf Anfrage



parametri di lavoro
cutting data
 paramètres d'usinage
 Schnittdaten

Applicazioni
Application groups
 Groupe d'emploi
 Anwendungsgruppen

