
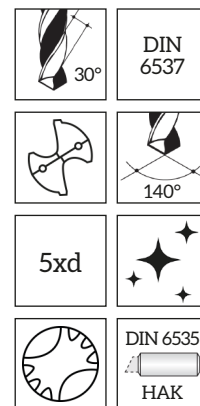


AITiSiN

THSR 2.920 H7

Punta foro e alesa H7 elicoidale con fori di lubrificazione
Drill Reamer with internal cooling H7
Foret aléseur H7 arrosage interne
Bohrreibahnen H7 mit Innenkühlung

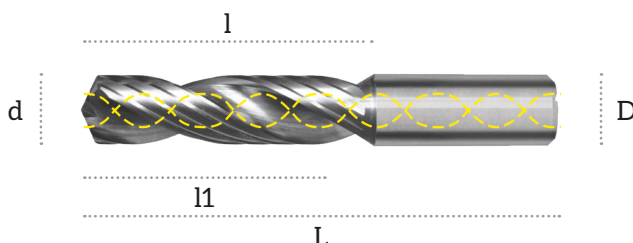

d H7	D h6	L	l	l1	AITiSiN
3.00	6.00	66	28	23	THSR 2.920-0300
4.00	6.00	74	36	29	THSR 2.920-0400
5.00	6.00	82	44	35	THSR 2.920-0500
6.00	6.00	82	44	35	THSR 2.920-0600
7.00	8.00	91	53	43	THSR 2.920-0700
8.00	8.00	91	53	43	THSR 2.920-0800
9.00	10.00	103	61	49	THSR 2.920-0900
10.00	10.00	103	61	49	THSR 2.920-1000
11.00	12.00	118	71	56	THSR 2.920-1100
12.00	12.00	118	71	56	THSR 2.920-1200



scheda tecnica
technical data sheet
données techniques
Technisches Datenblatt

Rivestimenti | esecuzione speciale | diametri intermedi | DIN 6535 HEK
Coating | out of range | other sizes | DIN 6535 HEK
Revêtement | exécution spéciale | diamètres intermédiaires | DIN 6535 HEK
Beschichtung | Sonderausführungen | Zwischenabmessungen | DIN 6535 HEK

Su richiesta
On request
Sur demande
Auf Anfrage



parametri di lavoro
cutting data
paramètres d'usage
Schnittdaten

Applicazioni
Application groups
Groupe d'emploi
Anwendungsgruppen

