



uncoated

AlTiSiN

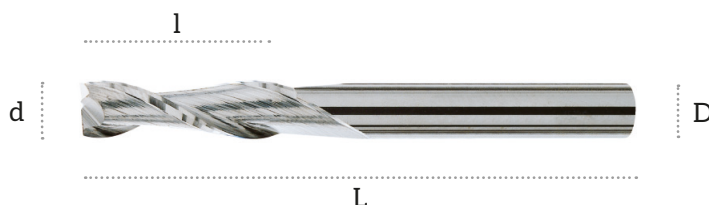
TiCN-B

TM 3.2 L

Fresa elicoidale 2 taglienti, taglio al centro

Twist end mill 2 flutes center cutting

Fraise hélicoïdale 2 lèvres coupe au centre

Schaftfräser 2 Schneiden spiralgenutet mit ZentrumschnittTUNIT
NORMDIN 6535
HA

d h9	D h6	L	l ap	uncoated	AlTiSiN	TiCN-B
3.00	3.00	55	20	TM 3.2L-0300	TM 3.2L-0300L	TM 3.2L-0300C
4.00	4.00	60	20	TM 3.2L-0400	TM 3.2L-0400L	TM 3.2L-0400C
5.00	5.00	60	20	TM 3.2L-0500	TM 3.2L-0500L	TM 3.2L-0500C
6.00	6.00	65	24	TM 3.2L-0600	TM 3.2L-0600L	TM 3.2L-0600C
8.00	8.00	80	32	TM 3.2L-0800	TM 3.2L-0800L	TM 3.2L-0800C
10.00	10.00	80	32	TM 3.2L-1000	TM 3.2L-1000L	TM 3.2L-1000C
12.00	12.00	100	50	TM 3.2L-1200	TM 3.2L-1200L	TM 3.2L-1200C
14.00	14.00	100	50	TM 3.2L-1400	TM 3.2L-1400L	TM 3.2L-1400C
16.00	16.00	100	50	TM 3.2L-1600	TM 3.2L-1600L	TM 3.2L-1600C
20.00	20.00	100	50	TM 3.2L-2000	TM 3.2L-2000L	TM 3.2L-2000C



scheda tecnica
technical data sheet
données techniques
Technisches Datenblatt



parametri di lavoro
cutting data
paramètres d'usinage
Schnittdaten

Esecuzione speciale | diametri intermedi | DIN 6535 HB
Out of range | other sizes | DIN 6535 HB
Exécution spéciale | diamètres intermédiaires | DIN 6535 HB
Sonderausführungen | Zwischenabmessungen | DIN 6535 HB

Su richiesta
On request
Sur demande
Auf Anfrage

Applicazioni
Application groups
Groupe d'emploi
Anwendungsgruppen

