



uncoated

AlTiSiN

TiCN-B



# TM 3.2 RL

Fresa elicoidale sferica 2 taglienti taglio al centro

*Ball nose end mill 2 flutes center cutting*

Fraise hélicoïdale à bout hémisphérique 2 lèvres coupe au centre

*Stirnradiusfräser 2 Schneiden spiralgenutet mit Zentrumschnitt*

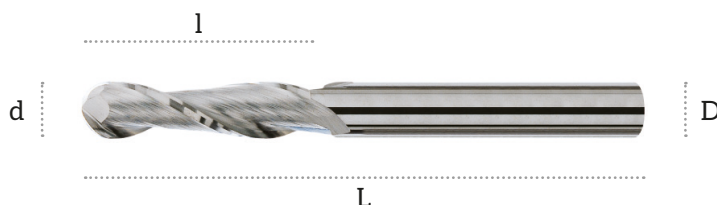

| d h9  | D h6  | L   | l ap | uncoated      | AlTiSiN        | TiCN-B         |
|-------|-------|-----|------|---------------|----------------|----------------|
| 3.00  | 3.00  | 55  | 20   | TM 3.2RL-0300 | TM 3.2RL-0300L | TM 3.2RL-0300C |
| 4.00  | 4.00  | 60  | 20   | TM 3.2RL-0400 | TM 3.2RL-0400L | TM 3.2RL-0400C |
| 5.00  | 5.00  | 60  | 20   | TM 3.2RL-0500 | TM 3.2RL-0500L | TM 3.2RL-0500C |
| 6.00  | 6.00  | 65  | 24   | TM 3.2RL-0600 | TM 3.2RL-0600L | TM 3.2RL-0600C |
| 8.00  | 8.00  | 80  | 32   | TM 3.2RL-0800 | TM 3.2RL-0800L | TM 3.2RL-0800C |
| 10.00 | 10.00 | 80  | 32   | TM 3.2RL-1000 | TM 3.2RL-1000L | TM 3.2RL-1000C |
| 12.00 | 12.00 | 100 | 50   | TM 3.2RL-1200 | TM 3.2RL-1200L | TM 3.2RL-1200C |



scheda tecnica  
technical data sheet  
données techniques  
Technisches Datenblatt



parametri di lavoro  
cutting data  
paramètres d'usinage  
Schnittdaten

Esecuzione speciale | diametri intermedi | 3 taglienti | DIN 6535 HB  
Out of range | other sizes | 3 flutes | DIN 6535 HB  
Exécution spéciale | diamètres intermédiaires | 3 lèvres | DIN 6535 HB  
Sonderausführungen | Zwischenabmessungen | 3 Schneiden | DIN 6535 HB

Su richiesta  
On request  
Sur demande  
Auf Anfrage

Applicazioni  
Application groups  
Groupe d'emploi  
Anwendungsgruppen

