

uncoated

AlTiSiN

TiCN-B

TM 3.4 R

Fresa elicoidale sferica 4 taglienti taglio al centro

Ball nose end mill 4 flutes center cutting

Fraise hélicoïdale à bout hémisphérique 4 lèvres coupe au centre


Stirnradiusfräser 4 Schneiden spiralgenutet mit Zentrumschnitt



TUNIT
NORM



DIN 6535
HA

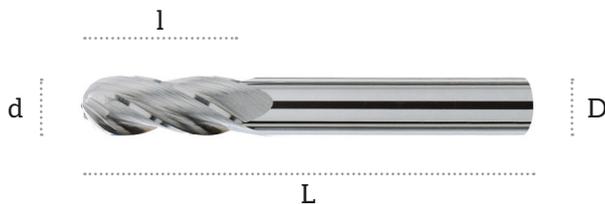

d h9	D h6	L	l ap	uncoated	AlTiSiN	TiCN-B
2.00	2.00	38	8	TM 3.4R-0200	TM 3.4R-0200L	TM 3.4R-0200C
2.50	2.50	38	8	TM 3.4R-0250	TM 3.4R-0250L	TM 3.4R-0250C
3.00	3.00	38	12	TM 3.4R-0300	TM 3.4R-0300L	TM 3.4R-0300C
3.50	3.50	40	12	TM 3.4R-0350	TM 3.4R-0350L	TM 3.4R-0350C
4.00	4.00	40	12	TM 3.4R-0400	TM 3.4R-0400L	TM 3.4R-0400C
4.50	4.50	50	14	TM 3.4R-0450	TM 3.4R-0450L	TM 3.4R-0450C
5.00	5.00	50	14	TM 3.4R-0500	TM 3.4R-0500L	TM 3.4R-0500C
5.50	5.50	50	16	TM 3.4R-0550	TM 3.4R-0550L	TM 3.4R-0550C
6.00	6.00	50	16	TM 3.4R-0600	TM 3.4R-0600L	TM 3.4R-0600C
7.00	7.00	60	20	TM 3.4R-0700	TM 3.4R-0700L	TM 3.4R-0700C
8.00	8.00	60	20	TM 3.4R-0800	TM 3.4R-0800L	TM 3.4R-0800C
8.50	8.50	60	20	TM 3.4R-0850	TM 3.4R-0850L	TM 3.4R-0850C
10.00	10.00	70	22	TM 3.4R-1000	TM 3.4R-1000L	TM 3.4R-1000C
12.00	12.00	70	22	TM 3.4R-1200	TM 3.4R-1200L	TM 3.4R-1200C
14.00	14.00	75	25	TM 3.4R-1400	TM 3.4R-1400L	TM 3.4R-1400C
16.00	16.00	75	25	TM 3.4R-1600	TM 3.4R-1600L	TM 3.4R-1600C



scheda tecnica
technical data sheet
données techniques
Technisches Datenblatt



parametri di lavoro
cutting data
paramètres d'usinage
Schnittdaten

Esecuzione speciale | diametri intermedi | DIN 6535 HB
Out of range | other sizes | DIN 6535 HB
Exécution spéciale | diamètres intermédiaires | DIN 6535 HB
Sonderausführungen | Zwischenabmessungen | DIN 6535 HB

Su richiesta
On request
Sur demande
Auf Anfrage

Applicazioni
Application groups
Groupe d'emploi
Anwendungsgruppen

