



uncoated

AlTiSiN

TiCN-B

TM 3.61 TL


Fresa con rompitruciolo dentatura ondulata

Roughing end mill coarse profile

Fraise ébauche à brise copeaux denture grosse

Schruppfräser Grob-VerzahnungTUNIT
NORMDIN 6535
HA

P

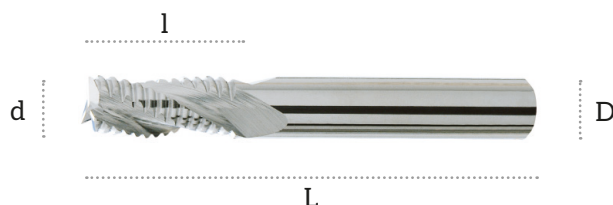

d h9	D h6	L	l ap	Z	P	uncoated	AlTiSiN	TiCN-B
6.00	6.00	50	14	3	1	TM 3.61TL-0600	TM 3.61TL-0600L	TM 3.61TL-0600C
8.00	8.00	60	19	3	1.5	TM 3.61TL-0800	TM 3.61TL-0800L	TM 3.61TL-0800C
10.00	10.00	70	22	4	1.5	TM 3.61TL-1000	TM 3.61TL-1000L	TM 3.61TL-1000C
12.00	12.00	74	26	4	2	TM 3.61TL-1200	TM 3.61TL-1200L	TM 3.61TL-1200C
14.00	14.00	76	28	4	2	TM 3.61TL-1400	TM 3.61TL-1400L	TM 3.61TL-1400C
16.00	16.00	83	32	4	2.5	TM 3.61TL-1600	TM 3.61TL-1600L	TM 3.61TL-1600C
18.00	18.00	85	32	4	2.5	TM 3.61TL-1800	TM 3.61TL-1800L	TM 3.61TL-1800C
20.00	20.00	93	35	4	2.5	TM 3.61TL-2000	TM 3.61TL-2000L	TM 3.61TL-2000C



scheda tecnica
technical data sheet
données techniques
Technisches Datenblatt



parametri di lavoro
cutting data
paramètres d'usinage
Schnittdaten

Esecuzione speciale | diametri intermedi | DIN 6535 HB
Out of range | other sizes | DIN 6535 HB
Exécution spéciale | diamètres intermédiaires | DIN 6535 HB
Sonderausführungen | Zwischenabmessungen | DIN 6535 HB

Su richiesta
On request
Sur demande
Auf Anfrage

Applicazioni
Application groups
Groupe d'emploi
Anwendungsgruppen

