

ZrN



TM 3TK-HPC Alu

Fresa HPC con fori radiali divisione irregolare 3 taglienti

Unequal division end mill with side coolant holes 3 flutes

Fraise division irrégulière avec trous d'huiles sur les goujures 3 lèbres

VHM-Hochleistungsfräser mit radial austretenden Kühlkanälen 3 Schneiden

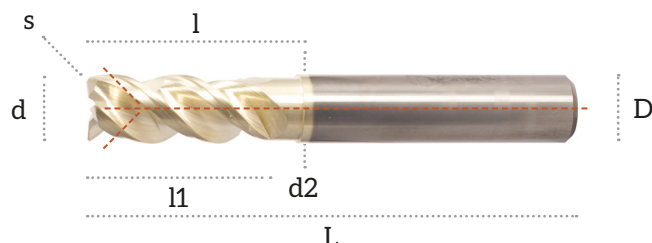

d h10	D h5	d2	s	L	l ap	l1	ZrN
6.00	6.00	5,5	0,2	57	21	13	TM 3TK-HPC-0600
8.00	8.00	7,4	0,2	63	26	19	TM 3TK-HPC-0800
10.00	10.00	9,2	0,25	72	30	22	TM 3TK-HPC-1000
12.00	12.00	11	0,3	83	37	26	TM 3TK-HPC-1200
16.00	16.00	15	0,4	92	42	32	TM 3TK-HPC-1600
20.00	20.00	19	0,45	104	50	38	TM 3TK-HPC-2000



scheda tecnica
technical data sheet
données techniques
Technisches Datenblatt



parametri di lavoro
cutting data
paramètres d'usinage
Schnittdaten

Diametri intermedi
Other sizes
Diamètres intermédiaires
Zwischenabmessungen

Su richiesta
On request
Sur demande
Auf Anfrage

Applicazioni
Application groups
Groupe d'emploi
Anwendungsgruppen

