



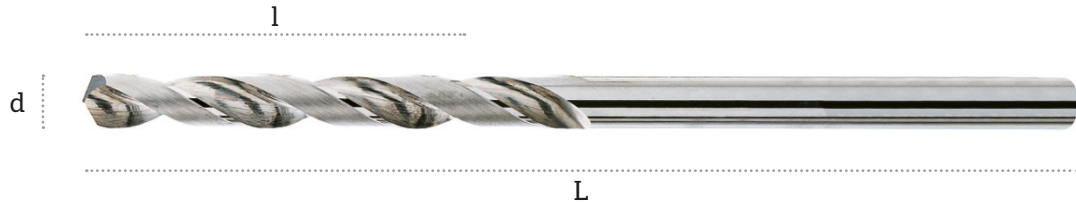

uncoated

# TD 1.500

Punta elicoidale  
Twist drill  
Foret hélicoïdale  
Spiralbohrer



d h6	L	l	uncoated
1.00	75	25	TD 1.500-0100
1.10	75	25	TD 1.500-0110
1.20	75	25	TD 1.500-0120
1.30	75	25	TD 1.500-0130
1.40	75	30	TD 1.500-0140
1.50	75	30	TD 1.500-0150
1.60	75	30	TD 1.500-0160
1.70	75	30	TD 1.500-0170
1.80	75	30	TD 1.500-0180
1.90	75	30	TD 1.500-0190
2.00	75	30	TD 1.500-0200
2.10	75	30	TD 1.500-0210
2.20	75	30	TD 1.500-0220
2.30	75	30	TD 1.500-0230
2.40	100	35	TD 1.500-0240
2.50	100	35	TD 1.500-0250
2.60	100	35	TD 1.500-0260
2.70	100	35	TD 1.500-0270
2.80	100	35	TD 1.500-0280
2.90	100	35	TD 1.500-0290
3.00	100	50	TD 1.500-0300
3.10	100	50	TD 1.500-0310
3.20	100	50	TD 1.500-0320

d h6	L	l	uncoated
3.30	100	50	TD 1.500-0330
3.40	100	50	TD 1.500-0340
3.50	100	50	TD 1.500-0350
3.60	100	50	TD 1.500-0360
3.70	100	50	TD 1.500-0370
3.80	100	50	TD 1.500-0380
3.90	100	50	TD 1.500-0390
4.00	100	50	TD 1.500-0400
4.10	100	50	TD 1.500-0410
4.20	100	50	TD 1.500-0420
4.30	100	50	TD 1.500-0430
4.40	100	50	TD 1.500-0440
4.50	100	50	TD 1.500-0450
4.60	100	50	TD 1.500-0460
4.70	100	50	TD 1.500-0470
4.80	100	50	TD 1.500-0480
4.90	100	50	TD 1.500-0490
5.00	150	75	TD 1.500-0500
5.10	150	75	TD 1.500-0510
5.20	150	75	TD 1.500-0520
5.30	150	75	TD 1.500-0530
5.40	150	75	TD 1.500-0540
5.50	150	75	TD 1.500-0550

d h6	L	l	uncoated
5.60	150	75	TD 1.500-0560
5.70	150	75	TD 1.500-0570
5.80	150	75	TD 1.500-0580
5.90	150	75	TD 1.500-0590
6.00	150	75	TD 1.500-0600
6.10	150	75	TD 1.500-0610
6.20	150	75	TD 1.500-0620
6.30	150	75	TD 1.500-0630
6.40	150	75	TD 1.500-0640
6.50	150	75	TD 1.500-0650
6.60	150	75	TD 1.500-0660
6.70	150	75	TD 1.500-0670
6.80	150	75	TD 1.500-0680
6.90	150	75	TD 1.500-0690
7.00	150	75	TD 1.500-0700
7.50	150	75	TD 1.500-0750
8.00	150	75	TD 1.500-0800
8.50	150	75	TD 1.500-0850
9.00	150	75	TD 1.500-0900
9.50	150	75	TD 1.500-0950
10.00	150	75	TD 1.500-1000
12.00	200	90	TD 1.500-1200

< 2.00 mm spirale 25° affilatura 118° | ≥ 2.00 mm spirale 30° affilatura 130°  
 < 2.00 mm helix 25° pointing 118° | ≥ 2.00 mm helix 30° pointing 130°  
 < 2.00 mm hélixe 25° affûtage 118° | ≥ 2.00 mm hélixe 30° affûtage 130°  
 < 2.00 mm Drall 25° Spitzenwinkel 118° | ≥ 2.00 mm Drall 30° Spitzenwinkel 130°



scheda tecnica  
technical data sheet  
données techniques  
Technisches Datenblatt



parametri di lavoro  
cutting data  
paramètres d'usage  
Schnittdaten

Rivestimenti | esecuzione speciale | diametri intermedi  
Coating | out of range | other sizes  
Revêtement | exécution spéciale | diamètres intermédiaires  
Beschichtung | Sonderausführungen | Zwischenabmessungen

Su richiesta  
On request  
Sur demande  
Auf Anfrage

Applicazioni  
Application groups  
Groupe d'emploi  
Anwendungsgruppen

