



uncoated

AlTiSiN

TiCN-B

TM 3.2 RXL

Fresa elicoidale sferica 2 taglienti taglio al centro

Ball nose end mill 2 flutes center cutting

Fraise hélicoïdale à bout hémisphérique 2 lèvres coupe au centre


Stirnradiusfräser 2 Schneiden spiralgenutet mit Zentrumschnitt



TUNIT
NORM



DIN 6535
HA

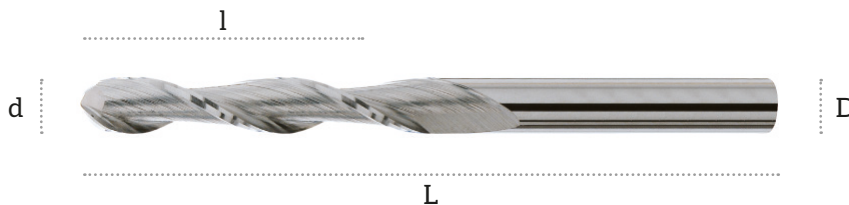

d h9	D h6	L	l ap	uncoated	AlTiSiN	TiCN-B
3.00	3.00	70	30	TM 3.2RXL-0300	TM 3.2RXL-0300L	TM 3.2RXL-0300C
4.00	4.00	75	40	TM 3.2RXL-0400	TM 3.2RXL-0400L	TM 3.2RXL-0400C
5.00	5.00	80	40	TM 3.2RXL-0500	TM 3.2RXL-0500L	TM 3.2RXL-0500C
6.00	6.00	80	45	TM 3.2RXL-0600	TM 3.2RXL-0600L	TM 3.2RXL-0600C
8.00	8.00	100	50	TM 3.2RXL-0800	TM 3.2RXL-0800L	TM 3.2RXL-0800C
10.00	10.00	100	50	TM 3.2RXL-1000	TM 3.2RXL-1000L	TM 3.2RXL-1000C
12.00	12.00	150	70	TM 3.2RXL-1200	TM 3.2RXL-1200L	TM 3.2RXL-1200C



scheda tecnica
technical data sheet
données techniques
Technisches Datenblatt



parametri di lavoro
cutting data
paramètres d'usinage
Schnittdaten

Esecuzione speciale | diametri intermedi | 3 taglienti | DIN 6535 HB
Out of range | other sizes | 3 flutes | DIN 6535 HB
Exécution spéciale | diamètres intermédiaires | 3 lèvres | DIN 6535 HB
Sonderausführungen | Zwischenabmessungen | 3 Schneiden | DIN 6535 HB

Su richiesta
On request
Sur demande
Auf Anfrage

Applicazioni
Application groups
Groupe d'emploi
Anwendungsgruppen

