
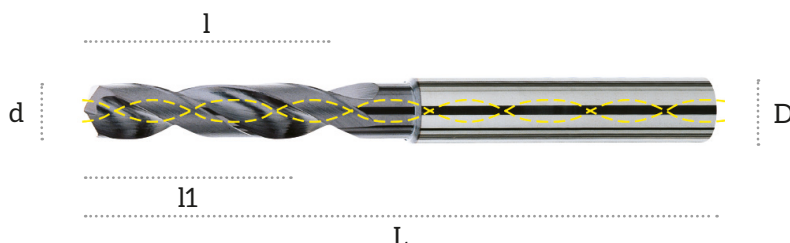


AITiSiN

THP 2.923 ST

Punta elicoidale ad alte prestazioni con fori di lubrificazione
Solid carbide high performance twist drill with interior cooling supplies
Foret hélicoïdale à haute performance avec trous d'huiles
Hochleistungsbohrer mit Innenkühlungen

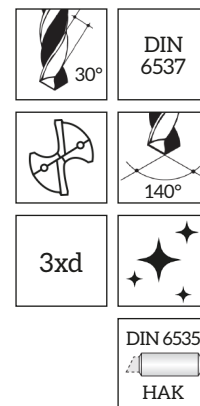

d m7	D h6	L	l	l1	AITiSiN
3.00	6.00	62	20	14	THP2.923ST-0300
3.10	6.00	62	20	14	THP2.923ST-0310
3.30	6.00	62	20	14	THP2.923ST-0330
3.50	6.00	62	20	14	THP2.923ST-0350
3.70	6.00	62	20	14	THP2.923ST-0370
3.80	6.00	66	24	17	THP2.923ST-0380
4.00	6.00	66	24	17	THP2.923ST-0400
4.20	6.00	66	24	17	THP2.923ST-0420
4.50	6.00	66	24	17	THP2.923ST-0450
4.80	6.00	66	28	20	THP2.923ST-0480
5.00	6.00	66	28	20	THP2.923ST-0500
5.10	6.00	66	28	20	THP2.923ST-0510
5.20	6.00	66	28	20	THP2.923ST-0520
5.50	6.00	66	28	20	THP2.923ST-0550
5.80	6.00	66	28	20	THP2.923ST-0580
6.00	6.00	66	28	20	THP2.923ST-0600
6.30	8.00	79	34	24	THP2.923ST-0630
6.50	8.00	79	34	24	THP2.923ST-0650
6.80	8.00	79	34	24	THP2.923ST-0680
7.00	8.00	79	34	24	THP2.923ST-0700
7.50	8.00	79	41	29	THP2.923ST-0750
7.80	8.00	79	41	29	THP2.923ST-0780
8.00	8.00	79	41	29	THP2.923ST-0800
8.50	10.00	89	47	35	THP2.923ST-0850
8.80	10.00	89	47	35	THP2.923ST-0880
9.00	10.00	89	47	35	THP2.923ST-0900

d m7	D h6	L	l	l1	AITiSiN
9.20	10.00	89	47	35	THP2.923ST-0920
9.50	10.00	89	47	35	THP2.923ST-0950
9.80	10.00	89	47	35	THP2.923ST-0980
10.00	10.00	89	47	35	THP2.923ST-1000
10.20	12.00	102	55	40	THP2.923ST-1020
10.50	12.00	102	55	40	THP2.923ST-1050
10.80	12.00	102	55	40	THP2.923ST-1080
11.00	12.00	102	55	40	THP2.923ST-1100
11.50	12.00	102	55	40	THP2.923ST-1150
11.80	12.00	102	55	40	THP2.923ST-1180
12.00	12.00	102	55	40	THP2.923ST-1200
12.50	14.00	107	60	43	THP2.923ST-1250
12.80	14.00	107	60	43	THP2.923ST-1280
13.00	14.00	107	60	43	THP2.923ST-1300
13.50	14.00	107	60	43	THP2.923ST-1350
14.00	14.00	107	60	43	THP2.923ST-1400
14.50	16.00	115	65	45	THP2.923ST-1450
15.00	16.00	115	65	45	THP2.923ST-1500
15.50	16.00	115	65	45	THP2.923ST-1550
16.00	16.00	115	65	45	THP2.923ST-1600
16.50	18.00	123	73	51	THP2.923ST-1650
17.00	18.00	123	73	51	THP2.923ST-1700
17.50	18.00	123	73	51	THP2.923ST-1750
18.00	18.00	123	73	51	THP2.923ST-1800
20.00	20.00	131	79	55	THP2.923ST-2000



scheda tecnica
technical data sheet
données techniques
Technisches Datenblatt

Rivestimenti | esecuzione speciale | diametri intermedi | DIN 6535 HEK
Coating | out of range | other sizes | DIN 6535 HEK
Revêtement | exécution spéciale | diamètres intermédiaires | DIN 6535 HEK
Beschichtung | Sonderausführungen | Zwischenabmessungen | DIN 6535 HEK

Su richiesta
On request
Sur demande
Auf Anfrage



parametri di lavoro
cutting data
paramètres d'usinage
Schnittdaten

Applicazioni
Application groups
Groupe d'emploi
Anwendungsgruppen

